

# ACU-RITE®

## NEW DR0203Q: “The Q”

### 2-D Geometric Readout



Perfect for optical comparators and measuring microscopes!




Measure and export 2-D feature data quickly over a USB-C serial connection


Familiar and intuitive interface




Curious?  
Learn more



Powered by Quadra-Chek



DRO203Q Technical Data	
<b>Display</b>	<ul style="list-style-type: none"> <li>• 3 Axes (X, Y, Z or Q)</li> <li>• 7-inch color wide screen (15:9)</li> </ul>
<b>Common Functions</b>	<ul style="list-style-type: none"> <li>• Optimized for use with Optical Comparators and Measuring Microscope systems</li> <li>• Datum 1/2 switching</li> <li>• Contextual Help Function</li> <li>• In/mm conversion</li> <li>• Installation Setup Walkthrough</li> </ul>
<b>Metrology Specific Functions</b>	<ul style="list-style-type: none"> <li>• Measuring, creating, and constructing of the following feature types:               <ul style="list-style-type: none"> <li>▪ Point      ▪ Skew</li> <li>▪ Line        ▪ Distance</li> <li>▪ Circle     ▪ Angle</li> </ul> </li> <li>• Feature graphic evaluation screen</li> <li>• Simple serial data output over USB-C connection to PC. Driver available on ACU-RITE website for download.</li> </ul>
<b>Accessories</b>	Single-Position Stand, Multiposition Holder, Mounting Frame, Protective Cover (1197275-01)
<b>Data Interface</b>	USB 2.0 type C <ul style="list-style-type: none"> <li>• For Output of Feature Data and Current Position to a USB Stick or PC</li> <li>• For Input of Parameters, Remote Control of Keys and Commands</li> </ul>
<b>Protection</b>	IP 40, Front Panel IP 54
<b>Construction</b>	Die-Cast Metal
<b>Weight</b>	~1.9 kg
<b>Electrical Requirements</b>	AC 100 V to 240 V (±10 %), 50 Hz to 60 Hz (±5 %), ≤ 33 W
<b>Operating Temperature</b>	0° to 45° C (32° to 113° F)
<b>Storage Temperature</b>	-20° to 70° C (-4° to 158° F)

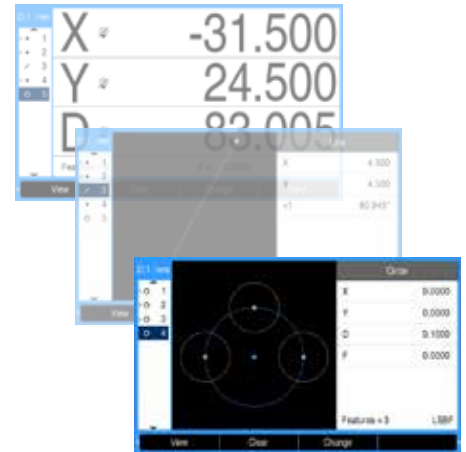


### Mounting


The DRO203Q can be mounted on the machine with the single-position stand, multiposition holder or the mounting frame.



**Single-Position**  
(1197273-01)



**Mounting Frame**  
(1197274-01)



**Multiposition Holder**  
(1197273-02)

With more than one million in use today, ACU-RITE® Precision Glass Scales withstand the elements of even the harshest machine shop environments. Built to resist changes in size, shape, or density due to temperature and humidity variations, this stability provides exceptional accuracy, resulting in tighter workpiece tolerances.

ACU-RITE® scales are available in travel lengths from 1"-120" and in resolutions from 0.5µm (.00002") to 5µm (.0002").



**Certifications**  
ISO-9001, UL, CSA, CE

Rev. 08/22 • ACU-RITE® is a registered trademark of HEIDENHAIN CORPORATION

# ACU-RITE®

**HEIDENHAIN CORPORATION**  
333 East State Parkway  
Schaumburg, IL 60173-5337 USA  
☎ (847) 490-1191  
☎ (847) 490-3931  
✉ info@heidenhain.com

www.acu-rite.com